


# Yealink BT42 Quick Start Guide

## Package Contents




USB Dongle



User Guide

## Assemble the USB Dongle

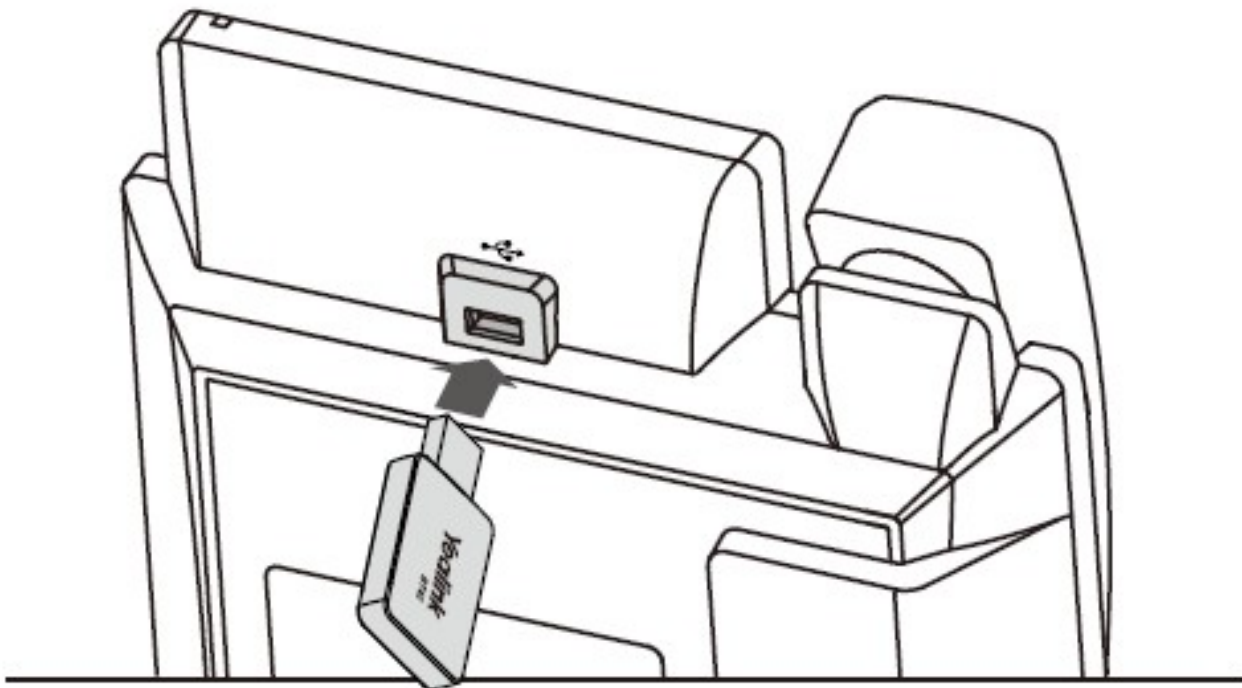

## Pair & Connect Bluetooth Headset to the Phone

1. Turn on the Bluetooth headset.
2. Long-press the multifunction key on the Bluetooth headset until the LED indicator alternately flashes red and blue.
3. The Bluetooth headset is in pairing mode.
3. Assemble the USB dongle.

#### 4. Activate the Bluetooth feature on the phone.

Refer to the corresponding user guide of the phone to activate the Bluetooth feature.

#### 5. Select **Scan** on the phone.

The phone starts searching for Bluetooth headsets within the working range of 10 meters (32 feet) and displays all detected Bluetooth headsets.

💡 The USB dongle provided by Yealink supports hot plug. You can plug and unplug the USB dongle without rebooting the phone.

## Answer Calls

#### 1. With the Bluetooth headset paired and connected, press the multifunction key on the Bluetooth headset to answer an incoming call.

If there is already an active call on the phone, the original call is placed on hold after answering the new incoming call.

## Adjust the Earphone Volume

With the Bluetooth headset paired and connected, you can do the following:

- Press the Volume key (+) on the Bluetooth headset to increase the volume.
- Press the Volume key (-) on the Bluetooth headset to decrease the volume.

## End Calls

With the Bluetooth headset paired and connected, press the multifunction key on the Bluetooth headset to end a call.

## Troubleshooting

### Why can't the phone detect the Bluetooth headset?

- Ensure the Bluetooth headset is turned on.
- Ensure the Bluetooth headset is in pairing mode when the phone is searching for Bluetooth headsets.

### Why is there a noise?

- Check the battery level. If the battery level is low, charge the Bluetooth headset.
- Ensure the Bluetooth headset and the phone are within the working range of 10 meters (32 feet) and there is no obvious interference (walls, doors, etc.) between them.

