


# HTI-ASP35-C

Distributed conference omni-microphone

**hitrolink**

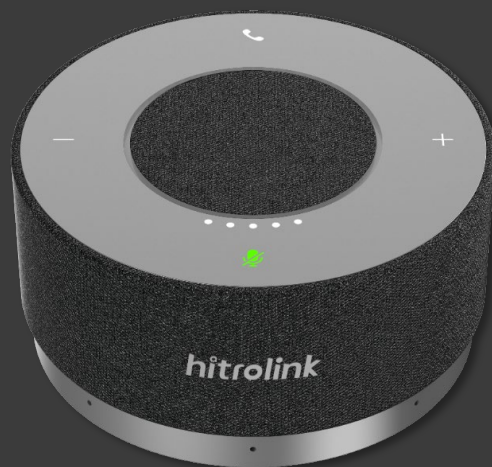

The Hitrolink ASP35-C can be used with Hitrolink VCS Terminals, providing 360° omnidirectional sound pickup, with a sound pickup radius of 8 meters and support a maximum of 4 levels of cascading.

## FEATURES SPOTLIGHT

---

- Adopt 8 MEMS microphone arrays to achieve 360° omnidirectional sound pickup.
- Maximum supported pickup radius of 6 meters.
- Full-duplex technology.
- Supports up to 4 devices cascaded, adaptable to all scenarios.
- Support USB plug and play, driver-free.
- AI intelligent noise reduction, AI echo cancellation, AI de-reverberation.

**SPECIFICATION**

<b>Built-in microphone</b>	Pickup Direction	360° omnidirectional sound pickup
	Number of microphones	8-microphone array
	Pickup distance	6m pickup radius
	Sampling frequency	16KHz
<b>Cascade function</b>	Cascade mode	POE cable cascade
	Number of cascades	Maximum 4 levels
<b>Interface</b>	Other interfaces	1*POE IN 1*POE OUT
	USB interface	1×USB2.0 Type-C
<b>Power supply</b>	Power supply mode	1 x power port (DC 53V) or USB power supply
<b>Installation</b>	Installation method	desktop
<b>Other parameters</b>	Adaptation system	Windows 7 and above, Android, Mac, Linux, etc.
	Suitable for meeting rooms	Small, medium and large meeting rooms
<b>Physical parameters</b>	Product size (mm)	φ126*67mm
	Packing size (mm)	314mm×172mm×89mm
	Weight (net weight)	0.513Kg
	Weight (gross)	1.383Kg